Air Live®
Powered by OvisLink Corp.

WL-5400CAM

54Mbps Wireless Internet IP Camera

Full Feature 54Mbps Wireless Camera

Air Live Wireless Internet IP camera is designed for Home or Enterprise customer users to enjoy the security and home networking entertainment advantages. It is a very simple to use with plug-n-play installation and wireless operation so you can install the camera anywhere. The web based configuration allow viewing the image from the Internet Live! and configure various security function as such video recording to a remote TFTP server. The 802.11g now allow the camera to operate at 30FPS(QVGA) speed and up to 640x480(10fps) resolution, it makes the video amazing life like for monitoring or archive purpose. The 802.11g models adds WPA support for secure data encryption.

Versatile Application

The camera is equipped with many advance function for all type of application. The motion detection function will trigger auto record function and send users email notification. It can even attached up to 3 images in the email so users will know the situation instantly without having to visit the site. For home users, you can monitor your young children from remote to ensure their security. WIth 640x480 resolution, you no longer have to second guess about the image on the screen.

Users can use the camera for video surveillance function. This Camera also can supports TCP/IP networking, SMTP e-mail, HTTP and other Internet related protocols. Other advanced feature for this camera is that it has Powerful IPView application software for image capture and video recording and can Support both ActiveX control and Java applet for Internet Explorer and Netscape Navigator. It allow your PC to manage up to 16 video cameras* at the same time with motion sensor, scheduled, or always recording.

View from your Mobile phone

The new Mobile View Java Utility** allow your GPRS mobile phone to view the IPCAM from remote. Parents can monitor their baby anywhere anytime. In addition, it is also useful for company manager or dairy farmers to view their work area where ever they goes.

* Please contact our tech support for details
** Please download the utility&guide from here.

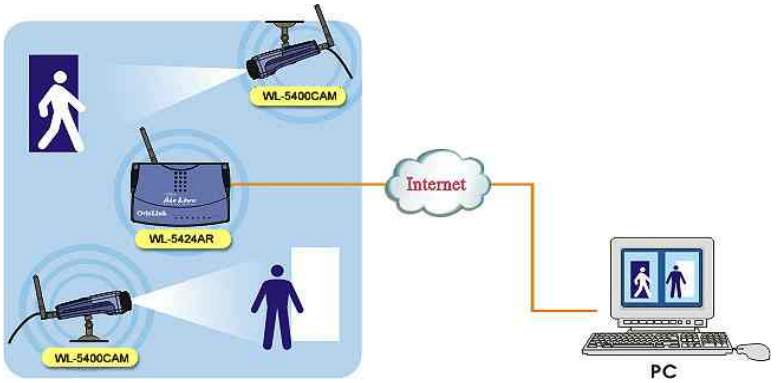

Manufacturer
OvisLink Corp.
2F, No. 8, Lane 130, Min-Chuan Rd, Hsin-Tien City, Taipei, Taiwan.

Air Live®
Powered by OvisLink Corp.

Specification

Users:
- Add User
- 64 users maximum
- User name
- User Password
- Delete User

Wireless
- 802.11g Wireless
- compatible with 802.11b
- 20dBm
- WPA and WEP support

Upload configuration:
- FTP Server
- Time Schedule
- Manual Operation

Camera Specification:
- Sensor resolution 640 x 480 pixel
- Sensor Color CMOS Sensor
- Automatic Gain control (AGC) Yes
- Automatic Exposure (AE) Yes
- Automatic White Balance Yes
- Signal/Noise ratio 57dB
- Len f:6.0 mm, F: 1.8

Image (Video Setting) :
- JPEG still image compression
- Image frame rate
- 32fps@QVGA, 25fps@CIF,10fps@VGA
- Compression Rate selection
- 5 levels, very low, low, middle, high, very high
- Frame rate setting
- 1, 5, 7, 15, 20, auto (depend on the video format)
- Video resolution
- 160x120@30fps, 320 x 240@25fps, 640 x 480@10fps
- Brightness control Yes
- Contrast control Yes
- Saturation Yes

Communication:
- FCC, CE, VCCI
- LAN port
- RJ45, 10/100M auto-sensed
- Wireless LAN
- Built-in 802.11b wireless LAN module
- Communication protocol
- HTTP, FTP, TCP/IP, UDP, ARP, ICMP, BOOTP, RARP, DHCP,
- PPPoE, SMTP

System:
- CPU RDC RDC2880
- RAM 8MB Byte
- Flash ROM 2MB Byte
- OS RTOS

Power:
- DC 5V, switching type power supply
- Power consumption
- 6.5Watt (1300mA x 5V), Maximum

LED:
- Power LED Green color
- Activity LED Orange color

Operating environment:
- Operating temperature
- 5 degree C~40 degree C
- Storage temperature :-25 degree C ~ 50 degree C
- Humidity : 5% ~ 95% non-condensing

EMI:
- FCC, CE, VCCI

Ordering Information

AirLive WL-5400CAM 802.11g Wireless Internet IP camera

Manufacturer
OvisLink Corp.
2F, No. 8, Lane 130, Min-Chuan Rd, Hsin-Tien City, Taipei, Taiwan.